

# 3 Rooms Multi for Singapore

Our new air conditioner, consisting of indoor and outdoor units, cools up to three rooms simultaneously and boasts 4 Tick energy saving performance. Three-room air conditioners account for 60 percent of all sales of multi split air conditioners in Singapore.



ASAG07LM / ASAG09LM / ASAG12LM  
Indoor unit



AOAG20LBTA3  
Outdoor unit


Point

## New, highly energy-saving air conditioner suitable for use at apartment houses

Equipped with large capacity DC compressors, the compact air conditioner realizes 4 Tick energy saving performance.




3 Rooms Multi



Point

### Compact Outdoor Unit


The outdoor unit measures only 700 mm tall. As it is shorter than balcony fences of apartment houses, installation of the unit will not spoil the view.

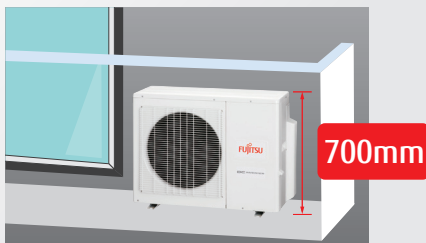

Point

### Powerful Wall Mounted

Fujitsu General original power diffuser is mounted. Diffuser operates automatically matched to the operation mode to control the optimal airflow. Comfortable space is quickly realized.



High Density  
Heat Exchanger  
Power Diffuser



## Optional Parts

Wired Remote Controller :	UTY-RNNYM
Simple Remote Controller :	UTY-RSNYM
Communication Kit :	UTY-XCBXZ2
External Connect Kit :	UTY-XWZXZ5


## Feature Explanation

 Economy Mode	 Up/down Swing Flaps	 Ion Deodorization Filter
 Power Diffuser	 Automatic Fan Speed	 Apple-Catechin Filter
 Powerful Mode	 Auto Restart	 Washable Panel
 10°C HEAT Operation	 Sleep Timer	
 Auto-Changeover	 Program Timer	


## Dimensions

Indoor Unit : ASAG07LM / ASAG09LM / ASAG12LM

(Unit : mm)

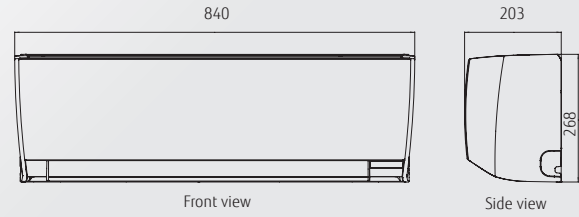

Outdoor Unit : AOAG20LBT3

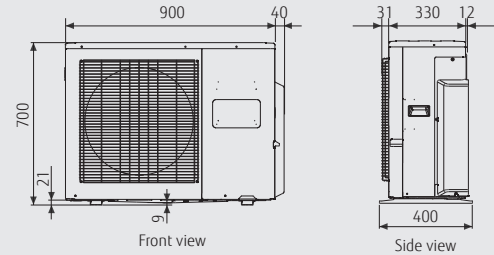

## Specifications

Model No.	Outdoor unit		AOAG20LBT3
Power Source		V/ Ø/Hz	230 / 1 / 50
Cooling Capacity (Min - Max)	Cooling	kW	5.7 (1.8 - 8.5)
Input Power	Cooling	kW	1.33
EER	Cooling	W/W	4.29
COP	Heating	W/W	3.94
Current	Cooling	W/W	1.33
Energy Rank	Cooling		4 Tick
Annual Energy Consumption	Cooling	kWh	2557
Sound Pressure Level	Cooling	dB(A)	48
Air flow	Cooling	m³/h	3,300
Connection Pipe Diameter (Liquid / Gas)		mm	6.35 x 3
Maximum Pipe Length (Pre-Charge)		m	50 (30)
Maximum Height Difference		m	15
Operation Range (Outdoor)	Cooling	°CDB	10 to 46
Dimensions (H x W x D)		mm	700 x 900 x 330
Product Weight		kg	55
Refrigerant	Type (Global Warming Potential)		R410A (2,088)
	Charge	g	2,200

### Wall Mounted Type

Model No.	Indoor unit		ASAG07LM	ASAG09LM	ASAG12LM	ASAG18LF	ASAG24LF
Cooling Capacity (Min - Max)		kW	2.1 / 2.7	2.5 / 3.4	3.5 / 3.8	5.0 / 6.0	6.8 / 7.4
Air flow (H/M/L/Q)	Cooling	m³/h	560 / 500 / 430 / 310	600 / 520 / 430 / 310	660 / 560 / 450 / 310	900 / 740 / 620 / 550	1,120 / 900 / 740 / 620
Sound Pressure Level (H/M/L/Q)	Cooling	dB(A)	36 / 32 / 29 / 21	37 / 33 / 29 / 21	40 / 36 / 30 / 21	43 / 37 / 33 / 26	49 / 42 / 37 / 33
Dimensions (H x W x D)		mm	268 x 840 x 203	268 x 840 x 203	268 x 840 x 203	320 x 998 x 238	320 x 998 x 238
Connection Pipe Diameter (Liquid Ø / Gas Ø)		mm	Ø6.35 (1/4) / Ø9.52 (3/8)	Ø6.35 (1/4) / Ø9.52 (3/8)	Ø6.35 (1/4) / Ø9.52 (3/8)	Ø6.35 (1/4) / Ø12.7 (1/2)	Ø6.35 (1/4) / Ø15.88 (5/8)
Product Weight		kg	8.5	8.5	8.5	14.0	14.0

### Compact Cassette Type

Model No.	Indoor unit		AUAG09LV	AUAG12LV	AUAG14LV	AUAG18LV
Cooling Capacity (Min - Max)		kW	2.5 / 3.4	3.5 / 3.8	4.0 / 4.5	5.0 / 6.0
Air flow (H/M/L/Q)	Cooling	m³/h	540 / 490 / 440 / 390	610 / 530 / 470 / 410	680 / 580 / 490 / 410	750 / 610 / 520 / 410
Sound Pressure Level (H/M/L/Q)	Cooling	dB(A)	33 / 31 / 29 / 27	37 / 33 / 31 / 28	40 / 35 / 32 / 29	42 / 37 / 33 / 29
Dimensions (H x W x D)		mm	245 x 570 x 570	245 x 570 x 570	245 x 570 x 570	245 x 570 x 570
Connection Pipe Diameter (Liquid Ø / Gas Ø)		mm	Ø6.35 (1/4) / Ø9.52 (3/8)	Ø6.35 (1/4) / Ø9.52 (3/8)	Ø6.35 (1/4) / Ø12.7 (1/2)	Ø6.35 (1/4) / Ø12.7 (1/2)
Product Weight		kg	15.0	15.0	15.0	15.0

Note: Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB. Heating : Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5m Height difference : 0m (Outdoor unit - Indoor unit)

- Specifications and design are subject to change without notice for further improvement.
- Actual products' colors may be different from the colors shown in this printed material.

Sole Agent:

**WINfinity**

Winfinity (S'pore) Pte Ltd

19 Greenwich Drive, #03-00 Kerry Logistics Centre, Singapore 534021

Tel: 6844 2220 Fax: 6844 2221 www.winfinity.com.sg