


Low noise level


A low noise level has been achieved for each capacity

Model		7	9	12	14	18
Static pressure range	Pa	0 to 50				
Noise level (Low speed)	dB(A)	24	27	25	30	30

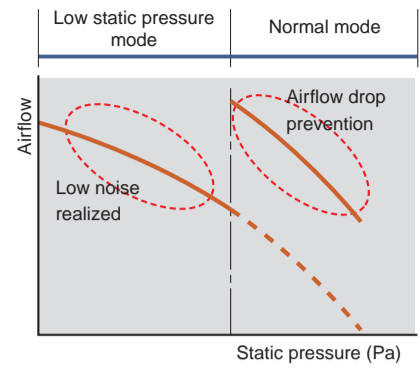



Slim design

This model is slim design, it can install at the place where a ceiling is narrow.


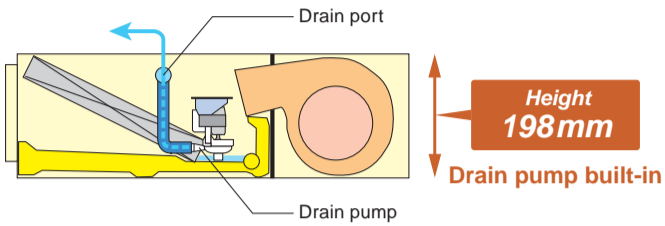


Flexible installation


Ceiling concealed



Floor concealed



High lift drain pump

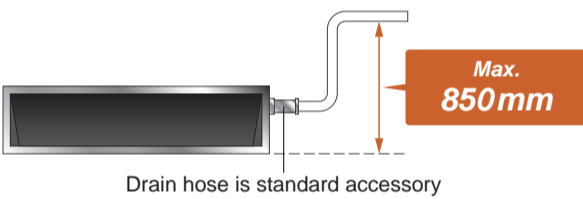


Drain hose is standard accessory

Auto Louver Grille Kit (Option)

Simple flat Auto Louver will provide comfort airflow and harmonize with luxury interior.

Slim Duct

Auto Louver Grille

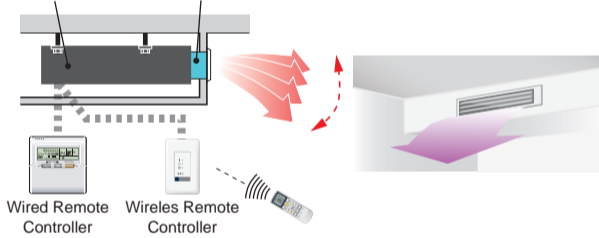

Selectable with a wide range of static pressure

By using DC fan motor, it is possible to change of static pressure range 0 to 90Pa. The change of static pressure range is possible by remote controller.




Static pressure range
0 to 90 Pa

*24 model is 0 to 50Pa

Filter (Accessory)


ARXD07 / 09 / 12 / 14 / 18

Filter
(2pcs.)




ARXD24

Filter
(3pcs.)



Air-intake

Air intake direction can be selected to match the installation site.

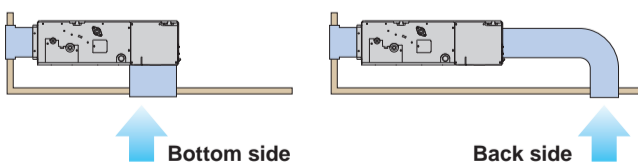

Optional parts

Remote Sensor Unit : UTD-RS100

IR Receiver Unit : UTB-*WB

Auto Louver Grille Kit : UTD-GXSA-W (for ARXD07/09/12/14LATH)

UTD-GXSB-W (for ARXD18LATH)

UTD-GXSC-W (for ARXD24LATH)

*WB : YWB, TWB