


Thin & Slim design

Thin and slim design is realized by Ø5mm heat exchanger and high efficiency wind blower.




H282 X W870 X D185

Big open panel and High density multi path heat exchanger

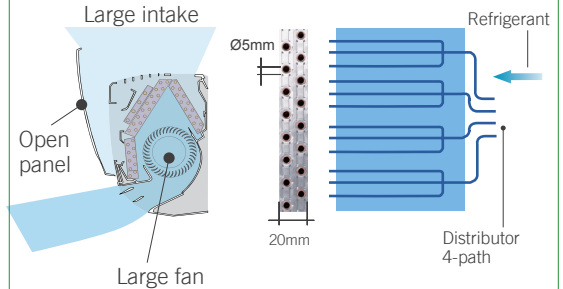

Powerful operation


20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

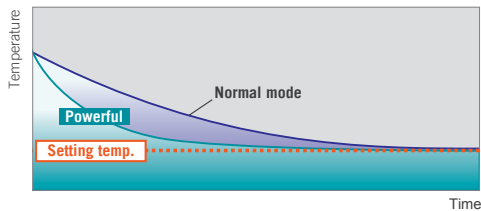

3 Mode timer (Weekly/Program/Sleep)


Weekly timer can be easily set by wireless remote controller. ON, OFF can be set up to 4 times in 1 day and up to 28 times in 1 week.

For other modes, program timer and sleep timer can be also selected by one push.

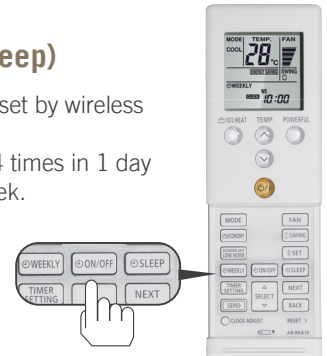


Low noise mode for outdoor unit

Low noise mode of outdoor unit can be selected by wireless remote controller.

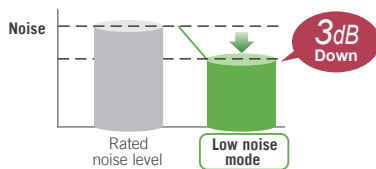


Low ambient operation

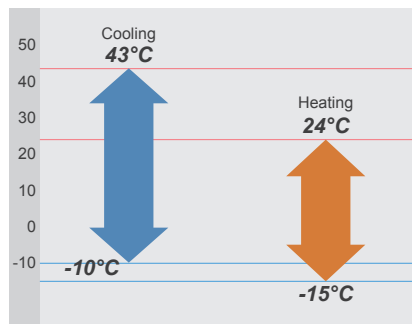

Economy operation

Setting temp. is shifted by 1°C automatically.

Ex. : Cooling operation

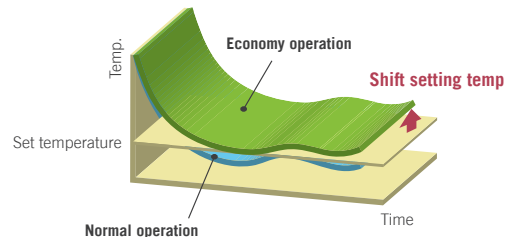

Optional Parts

Wired Remote Controller:

Simple Remote Control:
Communication Kit:
External Connect Kit:

UTY-RNNYM
UTY-RVNYM
UTY-RSNYM
UTY-TWBXF
UTY-XWZXZ5