


Compact



Model No.	Indoor Unit			AUAG12LV	AUAG18LV
Power Source		V/Ø/Hz		230 / 1 / 50	230 / 1 / 50
Air Circulation	High	m³/h		600	680
	Med			530	580
	Low			470	490
	Quiet			410	410
Sound Pressure Level	Cooling   H/M/L/Q	dB(A)		37 / 34 / 30 / 27	38 / 34 / 30 / 26
Net Dimension H x W x D		mm		245 x 570 x 570	245 x 570 x 570
Weight		kg/lbs		15 (33)	15 (33)
Piping Connections	Liquid Ø	mm (in)		Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Ø			Ø9.52 (3/8)	Ø12.7 (1/2)
Remote Control				Wired / Wireless	Wired / Wireless

**Optional Parts:**

Wired Remote Controller: UTB-YUD  
 Fresh Air Intake Kit: UTZ-VXAA

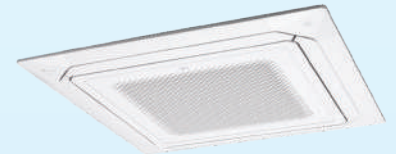

Model No.	Indoor Unit			AUAG24LR	AUAG30LRLA	AUAG36LRD-A	AUAG36LRD-A	AUAG45LRD-A
Power Source		V/Ø/Hz		230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50
Air Circulation	High	m³/h		1,600	1,600	1,900	2,000	2,000
	Med			1,400	1,400	1,640	1,650	1,650
	Low			1,270	1,270	1,460	1,460	1,460
	Quiet			1,150	1,150	1,250	1,300	1,300
Sound Pressure Level	Cooling   H/M/L/Q	dB(A)		40 / 38 / 36 / 32	40 / 38 / 36 / 32	43 / 38 / 36 / 32	46 / 42 / 39 / 35	46 / 42 / 39 / 35
Net Dimension H x W x D		mm		288 x 840 x 840	288 x 840 x 840	288 x 840 x 840	288 x 840 x 840	288 x 840 x 840
Weight		kg/lbs		23 (51)	23 (51)	26 (58)	29 (64)	29 (64)
Piping Connections	Liquid Ø	mm (in)		Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Ø			Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Remote Control				Wired / Wireless	Wired / Wireless	Wired / Wireless	Wired / Wireless	Wired / Wireless

**Optional Parts:**

IR Receiver Kit: UTY-LRHYA1 / UTY-LRHYA2 (24 / 36LR)  
 Fresh Air Intake Kit: UTZ-VXAA  
 Wired Remote Controller: UTB-YUD  
 Standard Wired Remote Controller (Three Wires): UTY-RNNYM (36LRD-A / 45LRD-A)  
 Human Sensor Kit: UTY-SHZXC (36LRD-A / 45LRD-A)  
 Fresh Air Intake: UTZ-VXRA (36LRD-A / 45LRD-A)

